

# ZMC30 Multicurrent Zigbee/BLE/Push

Smart Light Control


30 Watt

PF  $\lambda \geq 0,95$ 
IP 20
CE
EMC


M
M
F
110
SELV
 $t_a -10^{\circ} \div +40^{\circ}C$

50 mm  
 Dimmable



ZigBee 3.0  
 Bluetooth  
 Voice Control



Part Number	Iout	Vout Led Min	Vout Led Max	Uout	W @230V	W @110V	Dimensions A x B x c
A40ZMC03000B	250÷1000mA	3V	42V	46V	30W	21W	165x 41 x 27,5

Po Max at 100-120VAC	Po Max at 200-240VAC	I <sub>o</sub>	1	2	3	4
10W	10W	250mA	○	○	○	○
15W	15W	350mA	○	○	○	●
19W	19W	450mA	○	○	○	○
21W	21W	500mA	○	○	○	○
21W	23W	550mA	○	○	○	●
21W	25W	600mA	○	○	○	○
21W	27W	650mA	●	○	○	○
21W	29W	700mA	○	○	○	○
21W	30W	750mA	○	○	○	○
21W	30W	800mA	○	○	○	○
21W	30W	900mA	○	○	○	○
21W	30W	1000mA	○	○	○	○

Before use, always check dipswitch settings

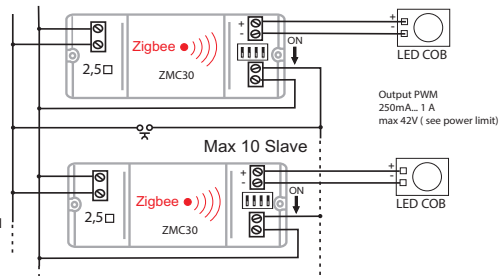

Datasheet download



Instruction download

- Alimentatore LED Wireless Zigbee+BLE +Push**
- Alimentatore indipendente - IP20 - Classe II di isolamento
  - Uscita in corrente costante 250÷1000mA, ±5% programmabile con DIP-switches (vedi schema)
  - Comando Zigbee 3.0 + Bluetooth Low Energy
  - Disponibile APP Android, IOS
  - Comando a pulsante lato primario con possibilità di impianti multipli sincronizzati

- Wireless Led driver Zigbee+BLE + Push**
- For independent mounting - IP20 - Insulation class II
  - Output in steady current 250÷1000mA, ±5% - DIP-switch setting (see diagram)
  - Zigbee 3.0 + Bluetooth Low Energy control
  - APP IOS/ANDROID available
  - Push control on the primary side with possible multiple connection by synchro.

