

6,5  
Watt



IP 20



CRI > 80



EMC



$t_a -20^{\circ} \div +40^{\circ}C$

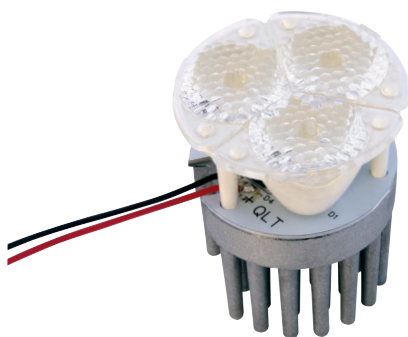

TRIO POWER MR16

Part Number	CCT (K)	Lumen Typ.	Beam	Lux @1m	I (Typ)	V (Typ)	W	Ø	Standard Size	EEC**
A40TZ1627WP0	2700K	582	Wide 40°	1200	700 mA	9,3V	6,5W	50 mm	MR16	D
A40TZ1627MP0	2700K	582	Medium 25°	2730	700 mA	9,3V	6,5W	50 mm	MR16	D
A40TZ1627NP0	2700K	582	Narrow 8°	9300	700 mA	9,3V	6,5W	50 mm	MR16	D
A40TZ1630WP0	3000K	600	Wide 40°	1280	700 mA	9,3V	6,5W	50 mm	MR16	D
A40TZ1630MP0	3000K	600	Medium 25°	3020	700 mA	9,3V	6,5W	50 mm	MR16	D
A40TZ1630NP0	3000K	600	Narrow 8°	10350	700 mA	9,3V	6,5W	50 mm	MR16	D
A40TZ1640WP0	4000K	610	Wide 40°	1320	700 mA	9,3V	6,5W	50 mm	MR16	C
A40TZ1640MP0	4000K	610	Medium 25°	3120	700 mA	9,3V	6,5W	50 mm	MR16	C
A40TZ1640NP0	4000K	610	Narrow 8°	10800	700 mA	9,3V	6,5W	50 mm	MR16	C
A40TZ1650WP0	5000K	750	Wide 40°	1430	700 mA	9,3V	6,5W	50 mm	MR16	C
A40TZ1650MP0	5000K	750	Medium 25°	3470	700 mA	9,3V	6,5W	50 mm	MR16	C
A40TZ1650NP0	5000K	750	Narrow 8°	12300	700 mA	9,3V	6,5W	50 mm	MR16	C

\*\* The EEC specification refers in each case to the installed light source(s)

### 🇮🇹 Spot a LED di potenza - 3 x 700mA

- Si adatta a faretti per lampadina dicroica Ø 50 mm
- Fornito con cavo da 50 cm
- Lente disponibile in tre differenti versioni: fascio stretto, medio e largo.
- Disponibile nei colori 2700K, 3000K, 4000K e 5000K

### 🇬🇧 High Brightness LED spot - 3 x 700mA

- Suitable for being built in standard Ø 50 mm downlights
- Supplied with 50 cm cable
- Different lens degrees available: narrow, medium and wide beam.
- Color temperatures available: 2700K, 3000K, 4000K and 5000K