


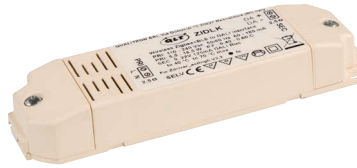


# ZIDLK Interface Zigbee/BLE - DALI

Smart Light Control

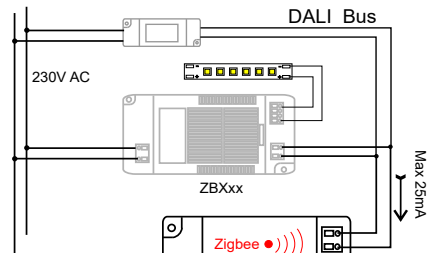

Part Number	Input V/AC	Input V/DC	Output I <sub>max</sub>	Output V <sub>min./max</sub>	Dimensions A x B x C
A40ZIDLK000B	110÷240V	9÷22V	0,125A	9÷22V	118 x 33 x 19

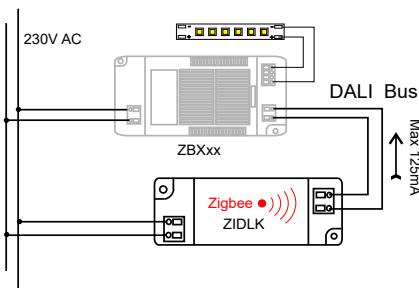

Datasheet download



Instruction download

## Interfaccia LED Wireless Zigbee+BLE a DALI

- Uso indipendente - IP20 - Classe II di isolamento
- Uscita segnale compatibile DALI2
- Comando Zigbee 3.0 + Bluetooth low Energy
- Disponibile APP Android, IOS
- Alimentazione dalla rete: fornisce sul bus DALI fino a 125mA
- Alimentazione dal bus DALI : assorbe dal Bus max 25mA

## Wireless Led Interface - Zigbee+BLE to DALI

- For independent mounting – IP20 – Insulation class II
- Signal output DALI2 compatible
- Zigbee 3.0 + Bluetooth Low Energy control
- APP IOS/ANDROID available
- Mains supply: on the DALI bus up to 125mA
- DALI bus supply: BUS absorption max 25mA

